

*15" Desktop Touch Monitor*

15 inch

## HV-150T



- ★ 15" TFT-LCD Monitor
- ★ 4-W Resistive type (USB Only)
- ★ Resolution : 1024 x 768 (XGA)

<http://www.gpegkorea.com>

**GPEG K&M LTD**

Suite 405, DAERUNG Techno Town 12,  
327-32, Gasan-Dong, Gumchun-Ku, Seoul, KOREA  
Tel : 82-2-868-5715, Fax : 82-2-868-5788  
e-mail : sales@gpegkorea.com



**GPEG K&M**  
● ● ●

# HV-150T Specification


15" Desktop Touch Monitor

PANEL	Display Type	TFT LCD Panel
	Max. Resolution	1024 x 768 (XGA)
	Screen size	15 Inch
	Display Colors	16 M Colors
	Pixel Pitch	0.297 x 0.297 mm
	Brightness	250cd/m <sup>2</sup> (Typical)
	Contrast Ratio	500 : 1 (typical)
	Viewing Angle	75°/75° (L/R) & 70°/60° (U/D) (Typical)
	Display Area	304 x 228 mm
Input Signal	Standard	Analog RGB (D-Sub 15pin)
	Video Signal (optional)	Video (Composite & S-Video)
	Sync.	Hori. 31.5 ~68KHz Vert. 56 ~ 75Hz
	Dot Clock	85MHz (Max.)
	Recommended	1024 x 768 @ 60Hz
Power Consumption	On working	< 30 watt (Max.)
	Stand By, Sleep	< 3 watt (Max.)
Plug & Play		DDC1 / DDC2B
Power saving		VESA DPMS
Power supply adapter	Input	AC 100V ~ 240V, 50 ~ 60 Hz
	Output	12V DC
Operating Temperature		0 ~ 40°C
Storage Temperature		-20 ~ 60°C
Operating Humidity		10%RH ~ 90%RH
Dimension		358 x 298 x 185
Weight (NET)		TBD
Standard accessories		VGA cable, AC adapter, Power cord, Touch cable, Touch CD-ROM
Touch Screen	Touch Screen	4-W Resistive
	Touch Interface	USB
Option	VESA ARM	75 x 75 mm
	Speaker	1W x 2 Speaker


Notice : Designs & Specifications are subject to change without notice

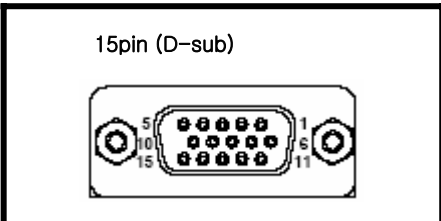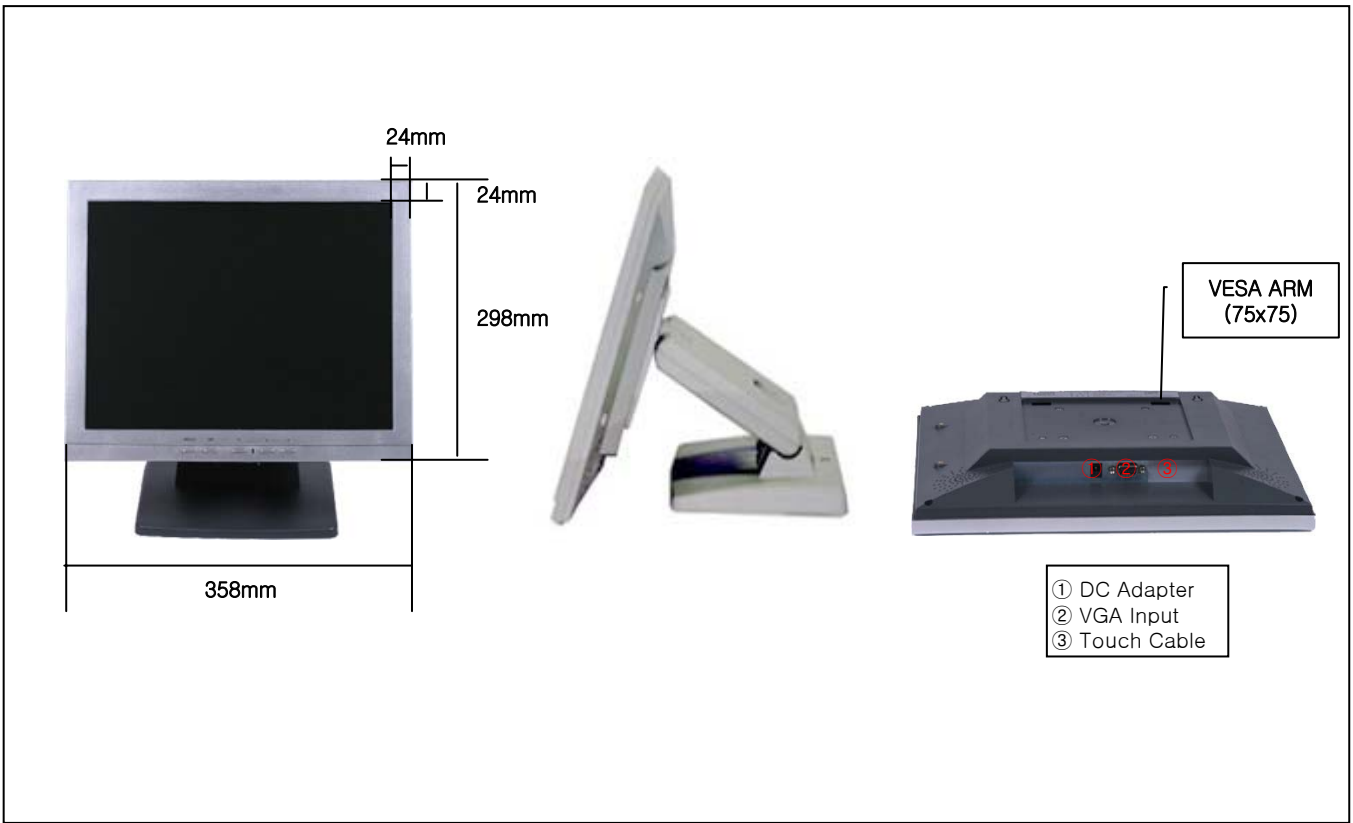


1	Red
2	Green
3	Blue
4	N.C
5	GND
6	R-GND
7	G-GND
8	B-GND
9	5Vin
10	S-GND
11	N.C
12	SDA
13	H-SYNC
14	V-SYNC
15	SCL

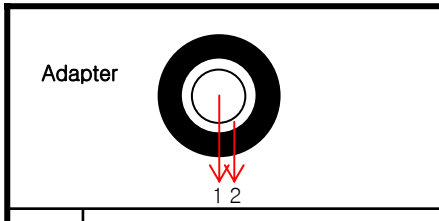

1	+12V DC
2	GND

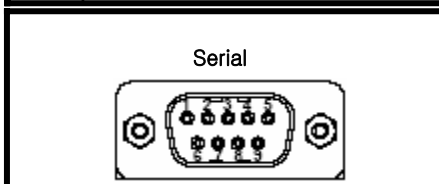

1	-
2	TXD (Transmit Data)
3	RXD (Receive Data)
4	-
5	GND
6	-
7	-
8	-
9	-

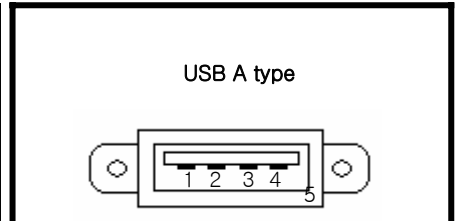

1	+5V DC Input Power
2	D-
3	D+
4	GND
5	GND

